

# LoadTECH® Filters MERV 11

High-Efficiency 12-Inch Extended Rigid Cell Filters with E-Pleat® Media Technology



## Long-Life, Energy-Saving Filters for Commercial Applications

Parker LoadTECH® high-impact polystyrene (HIPS) HVAC filters feature proprietary E-Pleat® media technology that provides enhanced performance when compared to traditional 12-inch filters. The 12-inch filter has a low initial resistance and high capacity and will be of tremendous value in applications where energy and total cost of ownership are priority. Ideal for variable air volume systems.

### Markets:

- Hotels and entertainment complexes
- Food processing
- Microelectronics manufacturing
- Data centers
- Commercial office buildings
- Schools and universities
- Clean manufacturing facilities
- Hospitals and healthcare facilities
- Government institutions
- Industrial manufacturing



### Contact Information:

Parker Hannifin Corporation  
**HVAC Filtration Division**  
100 River Ridge Circle  
Jeffersonville, Indiana 47130

phone 866 247 4827

[www.parker.com/HVAC](http://www.parker.com/HVAC)

### Product Features:

- Proprietary E-Pleat media technology efficiently directs air flow through the filter
- Synthetic media has a high capacity to capture dust
- Media resists tearing, damage, moisture, and microbial growth
- Longer filter life and fewer filter change outs with higher dust holding capacity
- Energy savings – Low pressure drop offers reduced energy use
- Completely incinerable with high impact polystyrene (HIPS) frame
- Lightweight construction




ENGINEERING YOUR SUCCESS.

# Parker LoadTECH Filters are Engineered for Long Life and Efficient Performance



Rugged frame resists cracking. Available in box and single header construction.


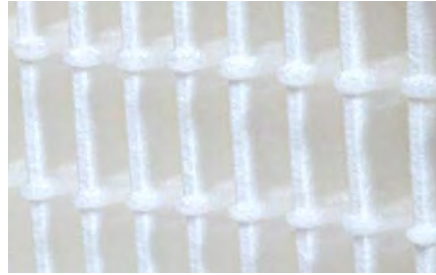


E-Pleat technology molds filtration media into a series of pre-formed channels that direct the air smoothly through the filter, allowing for even loading and complete media utilization.



Adhesive beads bond the pleats into a rigid pack.

## Parker LoadTECH – MERV 11

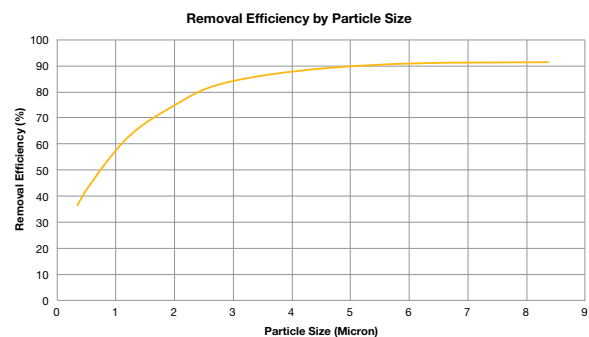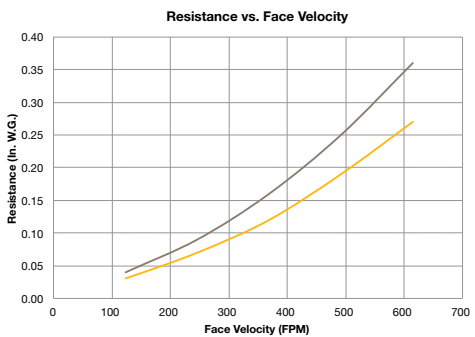

Model Number	Nominal Size (W x H x D) Inches	Actual Size (W x H x D) Inches	Rated Air Flow Capacity (CFM)	Initial Resistance (Inches W.G.) @ Rated Air Flow	Media Area (Square Feet)	MERV
<b>Box Construction</b>						
PLT12-M11-04-NH	24 X 24 X 12	23-3/8 x 23-3/8 x 11-1/2	2000	0.17"	126	11
PLT12-M11-15-NH	20 X 24 X 12	19-3/8 x 23-3/8 x 11-1/2	1650	0.17"	110	11
PLT12-M11-13-NH	20 X 20 X 12	19-3/8 x 19-3/8 x 11-1/2	1400	0.17"	90	11
PLT12-M11-03-NH	12 X 24 X 12	11-3/8 x 23-3/8 x 11-1/2	1000	0.17"	66	11
<b>Single Header Construction</b>						
PLT12-M11-04-PH	24 X 24 X 12	23-3/8 x 23-3/8 x 11-1/2	2000	0.19"	108	11
PLT12-M11-15-PH	20 X 24 X 12	19-3/8 x 23-3/8 x 11-1/2	1650	0.19"	90	11
PLT12-M11-13-PH	20 X 20 X 12	19-3/8 x 19-3/8 x 11-1/2	1400	0.19"	73	11
PLT12-M11-03-PH	12 X 24 X 12	11-3/8 x 23-3/8 x 11-1/2	1000	0.19"	49	11

**NOTES:**

1. Testing per ASHRAE Standard 52.2-2017. Performance based on 492 FPM face velocity for a 24x24 face size.
2. Rated face velocity 500 FPM.
3. Recommended final resistance 1.50" W.G.
4. Width and height dimensions are interchangeable. Filters can be installed with pleats vertical or horizontal.
5. Continuous Operating Temperature: 170°F (77°C).
6. Classified per UL 900 for flammability.
7. Special sizes not available.



Patent # 6,685,833



**FILTECH INC.**  
**221 West Eighth Avenue**  
**West Homestead, PA 15120-1010**  
**Ph. (412) 461-1400 ~ Fax (412) 461-2846**  
[filtersales@filtechinc.com](mailto:filtersales@filtechinc.com)  
[www.filtechinc.com](http://www.filtechinc.com)

Your Local Authorized Parker Distributor

**WARNING:** This product can expose you to chemicals, including chromium, styrene, which are known to the State of California to cause cancer, and lead, which are known to the State of California to cause birth defects and other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

